
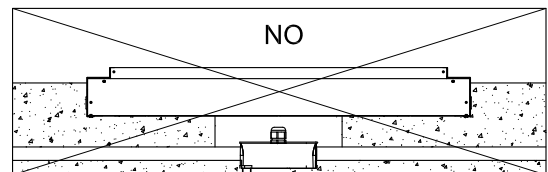
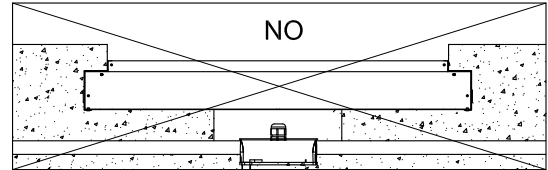
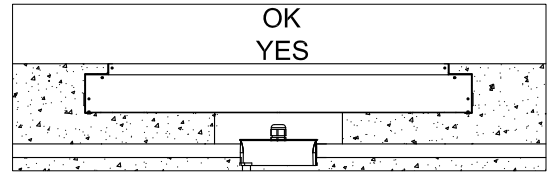




For installation of Light Linear LA inground uplight luminaires

Product drawing (dimensions)

SUITABLE FOR WET LOCATIONS

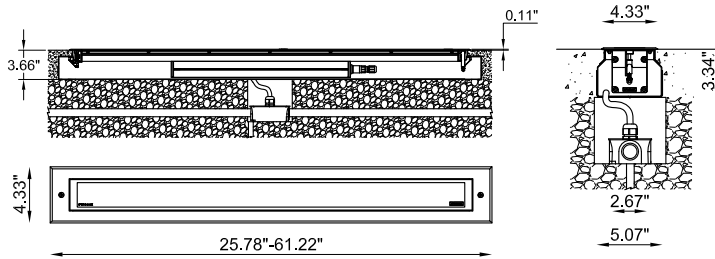

Junction box notes - A weather proof single gang rectangular junction box is to be provided by the installer [Kraloy F Series Single Gang Box or similar]. The recommended junction box size should be Length 4.58" x Width 3" x Depth 2.7". This box should be rated for install as per local electrical codes.

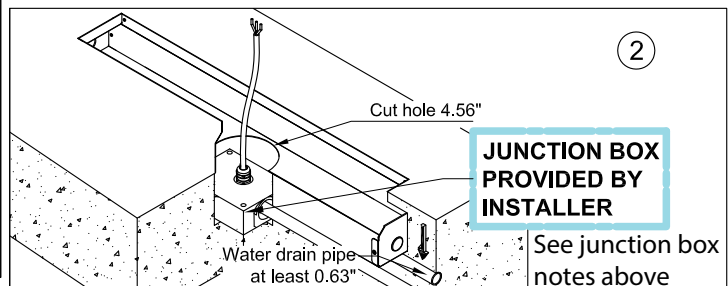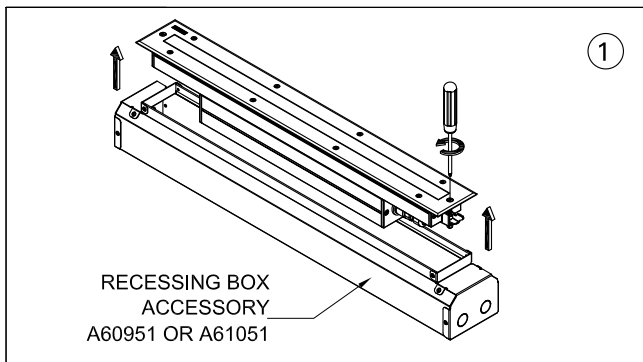

Notice to installer :

1. A level surface **MUST** be provided for proper installation.
2. A separate water proof wiring box for power connection must be provided (by others)
3. Fixtures may be damaged if connected to a system that contains water. The National Electric Code has specific requirements regarding connecting conduits through which moisture may contact energized live parts. These requirements must be strictly adhered to
4. Warning Risk of Fire and electrical shock : Fixture must be installed by a qualified electrician only. the fixture is intended for installation in accordance with the National Electrical Code, Local and Federal Code Specifications. Disconnect power before servicing.
5. This fixture has a voltage specific ballast, Check supply voltage is the same as the installed ballast.
6. It is the installers responsibility to make sure that there is sufficient drainage underneath and around the surface of the fixture to ensure that the fixture is not immersed under water for extended periods of time.

Water intrusion can be prevented by following simple drainage measures.

- *The following installation procedures are required to ensure the integrity of the fixture and prevent water intrusion.
- *Where the fixture is to be installed in concrete, a drain pipe 1/2 inch in diameter as well as adequate pea gravel should be laid from the bottom of the cavity to a drainage area.
- *If installed in soft ground at least 17" of gravel should be laid directly below the fixture and a drain pipe of at least 1/2" in diameter should be installed from the top of the gravel near the underside of the fixture leading to a drainage area.
- *The single or double cable glands that are provided must be securely fixed and properly tightened to the body of the fixture and tightened against the incoming power cord.
- *Before installing the cover and closing up the fixture, ensure that there is no moisture or water inside and that all rubber gaskets are clean and do not have residue or sand on them.
- *No silicon, glue or sealant should be used on the gaskets.

Close adherence to the installation procedure and ensuring that the above conditions are fully complied with, is critical for a successful installation of the inground (buried) fixtures




Please note that none compliance of the above instructions will void the guarantee provided by the factory.

Ligman RGBW/DMX & 0-10v dimming fixtures are provided with 5 wire, underwater rated 600v SO power cord. This consists of hot, neutral and ground, as well as twisted, shielded DMX +, DMX - and ground wire.

Ligman Lighting USA

7144 NW Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

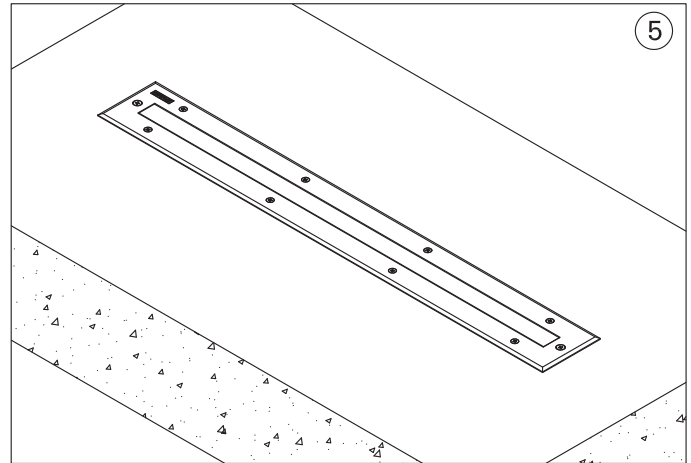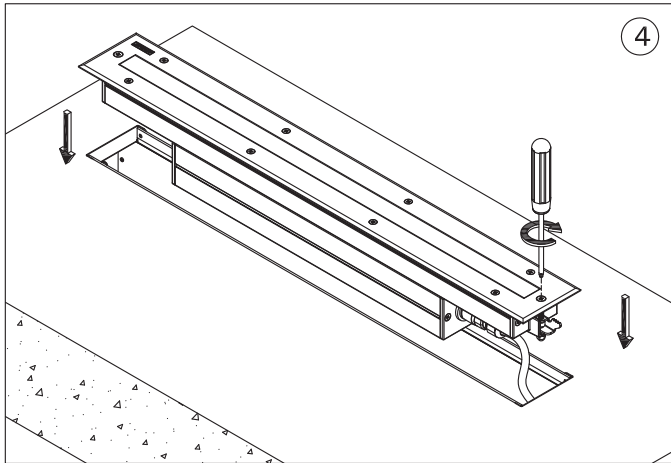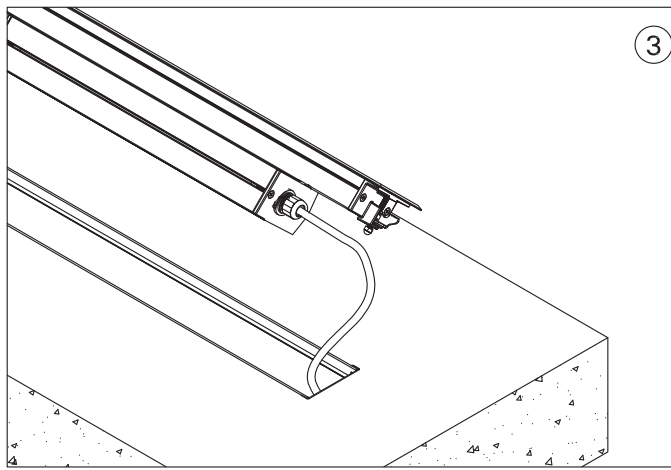


Note : Brush finish stainless steel products requirement to wipe the product periodically with a light oil (WD40 or equivalent) to remove any staining.

DMX WIRING DIAGRAM



GREEN	GROUND
BLACK	120/277 HOT
WHITE	NEUTRAL
YELLOW	DMX GROUND
PURPLE	DMX +
GREY	DMX -

SINGLE FIXTURE CONNECTION

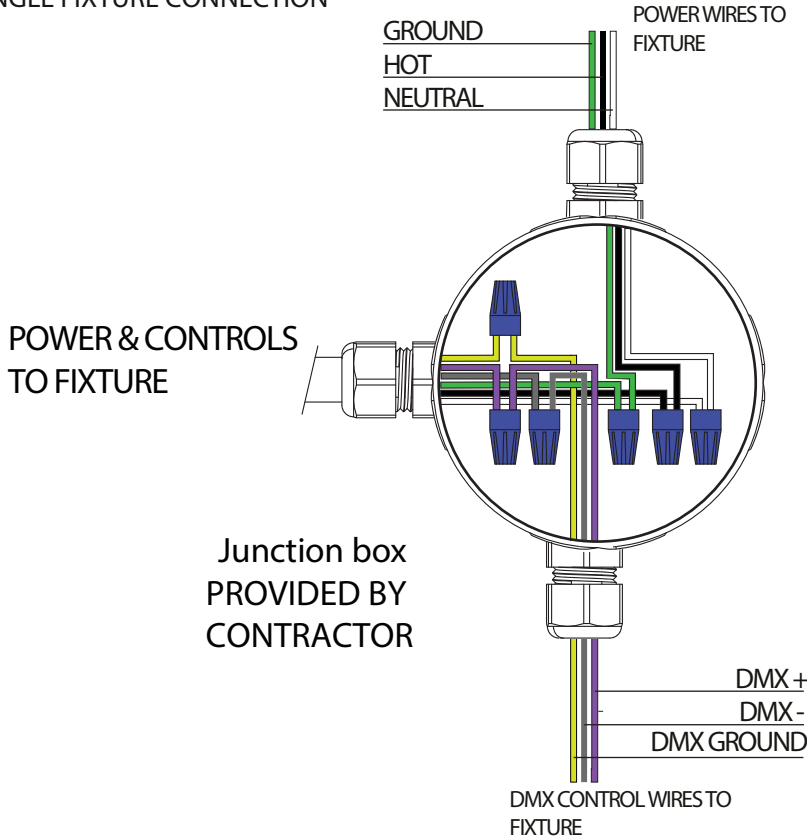

FOR LOOPING TO MULTIPLE FIXTURES

