

IP65 : Suitable for Wet Locations
 IK09 : Impact Resistant (Vandal Resistant)

UCL-30285

Classic 1 surface mounted luminaire LED

A range of square bulkheads with flat sheet impact resistant polycarbonate diffuser. Ideal for numerous indoor or outdoor applications. The Classic1 can be given a more striking appearance by using the grille frame.

Low copper content corrosion resistant die-cast aluminum frame and body. Stainless steel screws. Durable silicone rubber gasket and impact resistant UV stabilized polycarbonate diffuser. The luminaire is treated with a chemical chromatinized protection before powder coating, ensuring high corrosion resistance. Integral electronic control gear. Mounts over a 3" octagonal junction box and is ADA compliant.

Physical Data

Trim: 10.43"

Weight: 5.9 lbs

Lamp

20w - 800lm - White - LED ☉

LED Color (Please Specify)

W30 - 3000K
 W40 - 4000K

Voltage (Please Specify)

120V
 277V
 Other _____

Options (Please Specify)






Color (Please Specify)

01-Black - RAL 9011 02- Dark Grey - RAL 7043
 03-White - RAL 9003 04 - Metallic Silver - RAL 9006
 05-Matt Silver - RAL 9006 07- Custom - RAL _____
 06-Bronze - RAL 6014



EMR - Remote Battery Pack

SCE - Surface Conduit Entry - 1/2" 3/4"

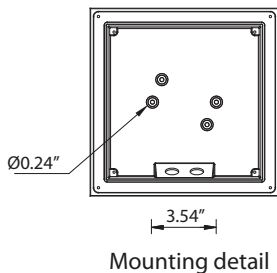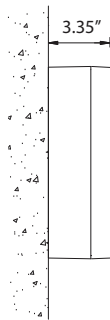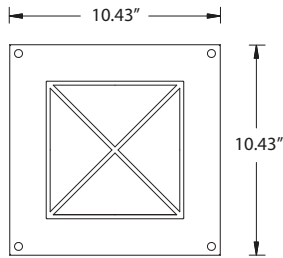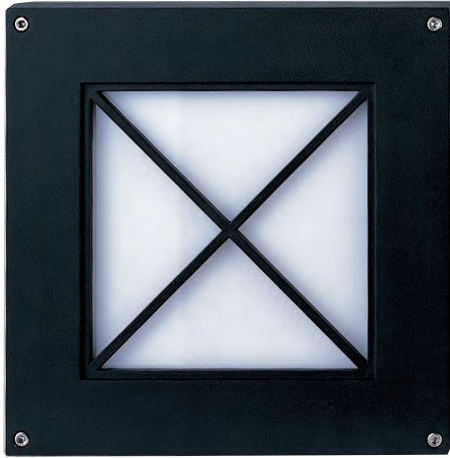

Ordering Example : UCL - 30285 - White-20w - W30 - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice.