

# UMA-97091

## Mar 10 Single Head Streetlight



**38w LED**  
**4872 Lumens**

**IP65**  
Suitable for wet locations

**IK07**  
Impact Resistant [Vandal Resistant]

**Weight 34.8 lbs**

**EPA - 1.5**

**POLE NOT INCLUDED**



### Construction

**Aluminum.**  
Less than 0.1% copper content - Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

**Pre paint**  
8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

**Memory Retentive -Silicon Gasket**  
Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

**Thermal management**  
LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

**Surge Suppression**  
Standard 10kv surge suppressor provided with all fixtures.

**BUG Rating**  
B3 - U1 - G0

**Finishing.**  
All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

**Paint**  
UV Stabilized 4.9mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

**Inspired by Nature Finishes**  
The Inspired by nature Finishing is a unique system of decorative powder coating. Our metal decoration process can easily transform the appearance of metal or aluminum product into a wood grain finish.

This patented technology enables the simulation of wood grain, and even marble or granite finish through the use of decorative powder coating.

The wood grain finish is so realistic that it's almost undistinguishable from real wood, even from a close visual inspection. The system of coating permeates the entire thickness of the coat and as a result, the coating cannot be removed by normal rubbing, chipping, or scratching.

**The Coating Process**  
After pre-treatment the prepared parts are powder coated with a specially formulated polyurethane powder. This powder provides protection against wear, abrasion, impact and corrosion and acts as the relief base color for the finalized metal decoration.

The component is then wrapped with a sheet of non-porous film with the selected decoration pattern printed on it using special high temperature inks.

This printed film transfer is vacuum-sealed to the surface for a complete thermo print and then transferred into a customized oven. The oven transforms the ink into different forms within the paint layer before it becomes solid. Finally, the film is removed, and a vivid timber look on aluminum remains.

Wood grain coating can create beautiful wood-looking products of any sort. There are over 300 combinations of designs currently in use. Wood grains can be made with different colors, designs, etc.

Our powder coatings are certified for indoor and outdoor applications and are backed by a comprehensive warranty. These coatings rise to the highest conceivable standard of performance excellence and design innovation.

- Added Benefits**
- Resistance to salt-acid room, accelerated aging
  - Boiling water, lime and condensed water resistant
  - Anti-Graffiti, Anti-Slip, Anti-Microbial, Anti-Scratch
  - Super durable (UV resistant)
  - TGIC free (non-toxic)

**Hardware**  
Provided Hardware is Marine grade 316 Stainless steel.

**Anti Seize Screw Holes**  
Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

**Crystal Clear Low Iron Glass Lens**  
Provided with tempered, impact resistant crystal clear low iron glass ensuring no green glass tinge.

**Optics & LED**  
Precise optic design provides exceptional light control and precise distribution of light.  
LED CRI > 80

**Lumen - Maintenance Life**  
L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)


**Circular column-mounted area downlight.**  
**Quintessential wolf in sheep's clothing; street lighting performance hidden inside urban lighting form.**

A small size pole mount area light. The LEDs have features such as long life, limited maintenance and constant lifetime performance. The high ingress protection allows these luminaires to be mounted for downward lighting. Asymmetrical type II, III, IV and symmetrical lens optics suitable for most kind of applications and dark sky concerns. Designed for lighting private roadways, car parks, exhibition areas, service stations, truck stops and sports grounds.


Color temperature 2700K, 3000K, 3500K and 4000K, LED CRI >80 and life time 50,000 Hours. High pressure die-cast marine grade LM6 aluminum body that is pre-treated with a nickel and zinc phosphate and then powder coated with a 4.9mil thick paint finish ensuring high corrosion resistance.

Marine grade 316 stainless steel fasteners. Durable memory retentive silicone rubber gasket and clear high impact tempered glass lens. This luminaire is provided prewired with power cord to the handhole to simplify installation. Lenses can be frosted to suit customer specifications. The Mar is available with either a 5° tilt or straight head mount.


To meet International Dark Sky criteria, 3000k or warmer LEDs must be selected and luminaire fix mounted (+/- 15° allowable to permit leveling).

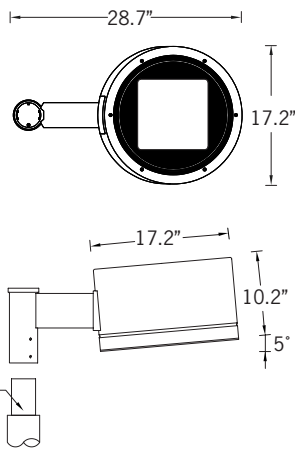

Ligman's micro Variable Optical System provides the ability to interchange, mix & rotate optics to provide specific light distributions for optimized spacing and uniformity.

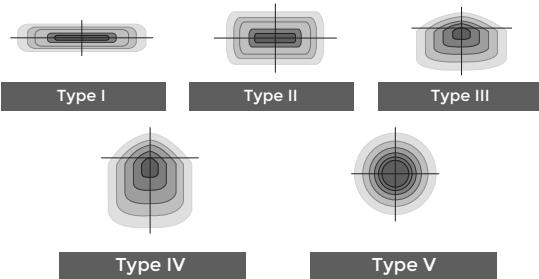

The variable optic system allows for the designer to create hybrid distributions for precise lighting requirements.



# UMA-97091

Mar 10 Single Head Streetlight



<b>PROJECT</b>		<b>DATE</b>	
----------------	--	-------------	--

<b>QUANTITY</b>		<b>TYPE</b>		<b>NOTE</b>	
-----------------	--	-------------	--	-------------	--

ORDERING EXAMPLE || UMA - 97091 - 38w - T2 - W30 - 02 - 120/277v - Options

<b>UMA-97091</b>																				
<b>LAMP</b>	38w LED 4872 Lumens	<b>BEAM</b>	T1 - Type I Distribution T2 - Type II Distribution T3 - Type III Distribution T4 - Type IV Distribution M - Medium 30° W - Wide 52° VW - Very Wide 64° EW - Extra Wide 108°	<b>LED COLOR</b>	W27 - 2700K W30 - 3000K W35 - 3500K W40 - 4000K															
<b>FINISH COLOR</b>			<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%; padding: 2px;">01 - BLACK RAL 9011</td> <td style="width: 10%;"></td> <td rowspan="7" style="width: 30%; padding: 2px; vertical-align: top;">120/277v Other - Specify</td> </tr> <tr> <td>02 - DARK GREY RAL 7043</td> <td></td> </tr> <tr> <td>03 - WHITE RAL 9003</td> <td></td> </tr> <tr> <td>04 - METALLIC SILVER RAL 9006</td> <td></td> </tr> <tr> <td>05 - MATTE SILVER RAL 9006</td> <td></td> </tr> <tr> <td>06 - LIGMAN BRONZE</td> <td></td> </tr> <tr> <td>07 - CUSTOM RAL</td> <td></td> </tr> </table>			01 - BLACK RAL 9011		120/277v Other - Specify	02 - DARK GREY RAL 7043		03 - WHITE RAL 9003		04 - METALLIC SILVER RAL 9006		05 - MATTE SILVER RAL 9006		06 - LIGMAN BRONZE		07 - CUSTOM RAL	
01 - BLACK RAL 9011		120/277v Other - Specify																		
02 - DARK GREY RAL 7043																				
03 - WHITE RAL 9003																				
04 - METALLIC SILVER RAL 9006																				
05 - MATTE SILVER RAL 9006																				
06 - LIGMAN BRONZE																				
07 - CUSTOM RAL																				

--	--	--	--

## ADDITIONAL OPTIONS

- |  |   |
|--|---|
| <p>DIM - 0-10v Dimming</p> <p>NAT - Natatorium Rated</p> <p>F - Frosted Lens</p> | <p>HSS - House Side Shield</p> <p>ST - Straight Head</p> <p>AMB - Turtle Friendly Amber LED</p> |
|--|---|

**INSPIRED BY NATURE FINISHES**

SW01 - OAK FINISH	
SW02 - WALNUT FINISH	
SW03- PINE FINISH	
DF - DOUGLAS FIR FINISH	
CW - CHERRY WOOD FINISH	
NW - NATIONAL WALNUT FINISH	
SU01 - CONCRETE FINISH	
SU02 - SOFTSCAPE FINISH	
SU03 - STONE FINISH	
SU04 - CORTEN FINISH	

THERE IS AN ADDITIONAL COST FOR THESE FINISHES

## More Custom Finishes Available Upon Request

Consult factory for pricing and lead times

Oak	Cherry	Beech	Carbon
Walnut	Chestnut	Bamboo	Galvanized
Pine	Mahogany	Birch	Steel



Example: Inspired by Nature Finish



# Mar Product Family



Mar 9

- UMA-31621-38w-4917lm
- UMA-31622-54w-6666lm



Mar 10

- UMA-97091-38w-4917lm
- UMA-97092-54w-6666lm



Mar 11

- UMA-97101-2x38w-2x4917lm
- UMA-97102-2x54w-2x6666lm