UVA-30023 Vancouver 30 Surface



Contemporary urban lighting furniture.

bespoke design.

Open-sided, three lattice pattern options or your

A stylish Dark Sky Compliant square high performance

wall mounted luminaire with downward light distribution

using LED lamps. This light column offers optimal visual

square design providing a unique wide light distribution,

offering an architecturally appealing shadow pattern on the mounted surface. The internal sides of the support-

Color temperature 2700K, 3000K, 3500K and 4000K and

during the day. Suitable for pedestrian areas, precincts,

internal driver housing compartment that is situated at

the top of the pole to stop water and dust from entering

completely wired with powercord and waterproof gland

from the driver enclosure to the base of the column to

Custom heights are available, please specify in options.

Designed to complement the Vancouver Light Column

the electrical components. This fixture is supplied

ensure quick trouble-free installation.

building surrounds, shopping centers, squares and parks.

The Vancouver comes standard with a unique waterproof

RGBW. The minimalistic shape provides distinctive

lighting effects by night and decorative urban effect


comfort through glare control by utilizing a controlled

optics designed by Ligman. These luminaires have a

ing pillars are accented by light from the LED.



39w COB 1670 Lumens **IP65** • Suitable For Wet Locations IK08 • Impact Resistant Weight 34.8 lbs



Construction

Aluminum. Less than 0.1% copper content – Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength , clean detailed product lines and excellent heat dissipation.

Pre paint

8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate

Memory Retentive -Silicon Gasket

Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

Thermal management

LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours

Standard 10kv surge suppressor provided with all fixtures.

BUG Rating Contact Factory

Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence

Paint

5 4"

f e

3.5" Mounting Detail

UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

Inspired by Nature Finishes The Inspired by nature Finishing is a unique system of decorative powder coating. Our metal decoration process can easily transform the appearance of metal or aluminum product into a wood grain finish.

This patented technology enables the simulation of wood grain, and even marble or granite finish through the use of decorative powder coating.

The wood grain finish is so realistic that it's almost undistinguishable from real wood, even from a close visual inspection. The system of coating permeates the entire thickness of the coat and as a result, the coating cannot be removed by normal rubbing, chipping, or scratching

The Coating Process

After pre-treatment the prepared parts are powder coated with a specially formulated polyurethane powder. This powder provides protection against wear, abrasion, impact and corrosion and acts as the relief base color for the finalized metal decoration.

The component is then wrapped with a sheet of non-porous film with the selected decoration pattern printed on it using special high temperature inks.

This printed film transfer is vacuum-sealed to the surface for a complete thermo print and then transferred into a customized oven. The oven transforms the ink into different forms within the paint layer before it becomes solid. Finally, the film is removed, and a vivid timber look on aluminum remains

Wood grain coating can create beautiful wood-looking products of any sort. There are over 300 combinations of designs currently in use. Wood grains can be made with different colors, designs, etc.

Our powder coatings are certified for indoor and outdoor applications and are backed by a comprehensive warranty. These coatings rise to the highest conceivable standard of performance excellence and design innovation.

Added Benefits

 Resistance to salt-acid room, accelerated aging
 Boiling water, lime and condensed water resistant
 Anti-Graffiti, Anti-Slip, Anti-Microbial, Anti-Scratch Super durable (UV resistant) TGIC free (non-toxic)

<u>Hardware</u> Provided Hardware is Marine grade 316 Stainless steel.

<u>Anti Seize Screw Holes</u> Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

Crystal Clear Low Iron Glass Lens

LED still achieve 80% of their original flux)

Provided with tempered, impact resistant crystal clear low iron glass ensuring no green glass tinge.

Optics & LED

Precise optic design provides exceptional light control and precise distribution of light. LED CRI > 80

Lumen - Maintenance Life L80 /B10 at 50,000 hours (This means that at least 90% of the

and bollard.


Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice

process before product painting.

UVA-30023

Vancouver 30 Surface



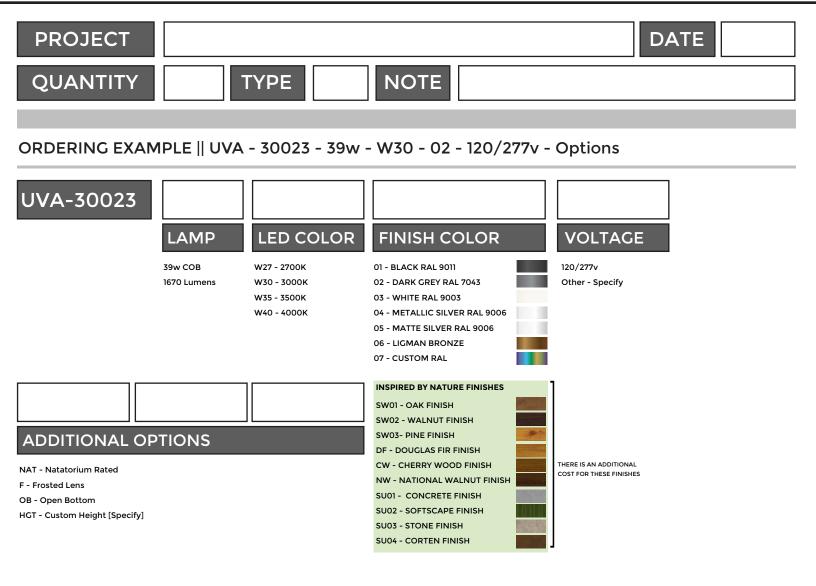

More Custom Finishes Available Upon Request

Consult factory for pricing and lead times

 Oak
 Cherry
 Beech
 Carbon

 Walnut
 Chestnut
 Bamboo
 Galvanized

 Pine
 Mahogany
 Birch
 Steel




Example: Inspired by Nature Finish



Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice

Vancouver Product Family

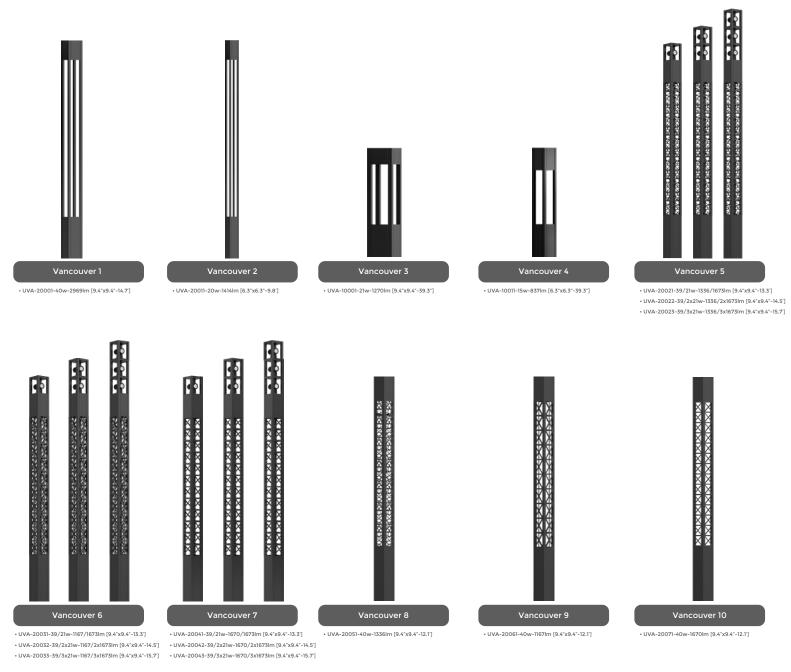



Vancouver 11

• UVA-10021-21w-570Im [9.4"x9.4"-39.3']



• UVA-10031-21w-490Im [9.4"x9.4"-39.3']

Vancouver 12

Vancouver 13

• UVA-10041-21w-704lm [9.4"x9.4"-39.3']

Vancouver 14

• UVA-70001-8w-331lm [6.3"x6.3"-15.7"]



• UVA-70011-21w-815lm [9.4"x9.4"-15.7"]



• UVA-20141-33w-2858Im [9.4"x9.4"-13.3'] • UVA-20142-66w-4287Im [9.4"x9.4"-14.5'] • UVA-20143-99w-5716lm [9.4"x9.4"-15.7']

• UVA-20144-132w-7145Im [9.4"x9.4"-17']

Vancouver 19

Vancouver 18 • UVA-20131-33w-2858Im [9.4"x9.4"-13.3'] • UVA-20122-66w-4287Im [9.4"x9.4"-14.5'] • UVA-201312-66w-4287Im [9.4"x9.4"-14.5'] • UVA-20123-99w-5716Im [9.4"x9.4"-15.7"] • UVA-20133-99w-5716Im [9.4"x9.4"-15.7"] • UVA-20124-132w-7145Im [9.4"x9.4"-17'] • UVA-20134-132w-7145Im [9.4"x9.4"-17']



• UVA-20112-66w-4287lm [9.4"x9.4"-14.5'] • UVA-20113-99w-5716lm [9.4"x9.4"-15.7"] • UVA-20114-132w-7145Im [9.4"x9.4"-17"]

۲



Vancouver 20

• UVA-20151-33w-1429Im [9.4"x9.4"-12.1']



Vancouver 26

• UVA-30012-21w-490lm [6.3"x6.3"-23.6"]

Vancouver 27 • UVA-30013-21w-740Im [6.3"x6.3"-23.6"]



Vancouver 28


• UVA-30021-39w-1336lm [9.4"x9.4"-39.3"] • UVA-30031-33w RGBW-429Im [9.4"x9.4"-39.3"]


Vancouver 29 • UVA-30022-39w-1167Im [9.4"x9.4"-39.3"] • UVA-30032-33w RGBW-1158lm [9.4"x9.4"-39.3"]



Vancouver 30

• UVA-30023-39w-1670Im [9.4"x9.4"-39.3"] • UVA-30033-33w RGBW-439Im [9.4"x9.4"-39.3"]

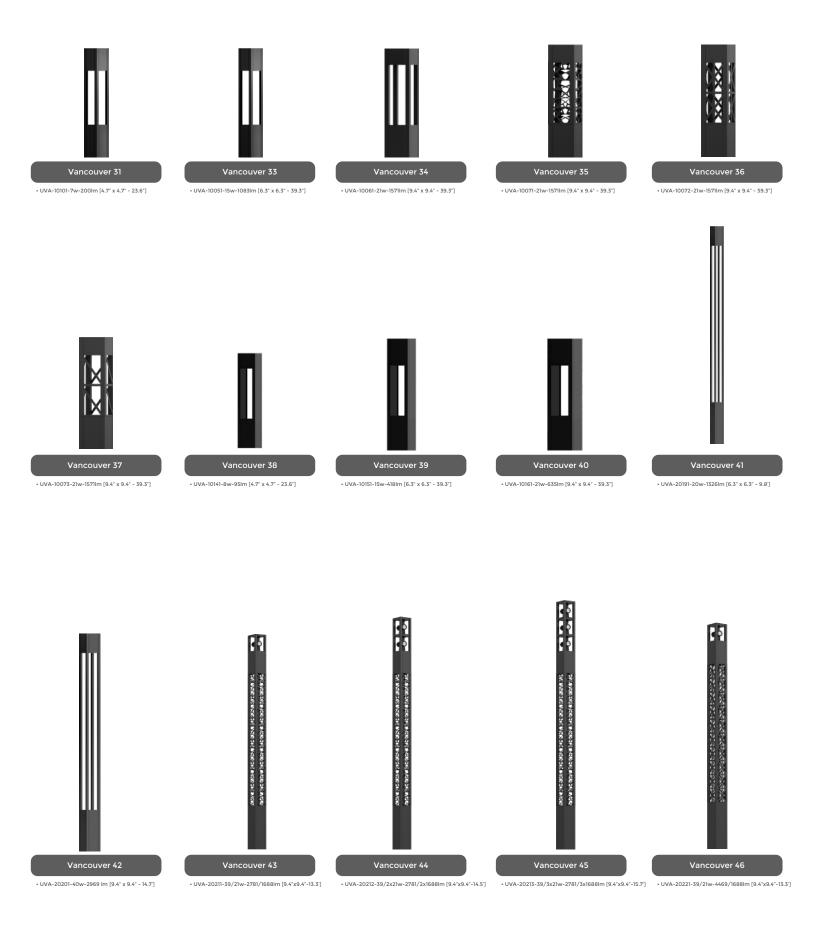

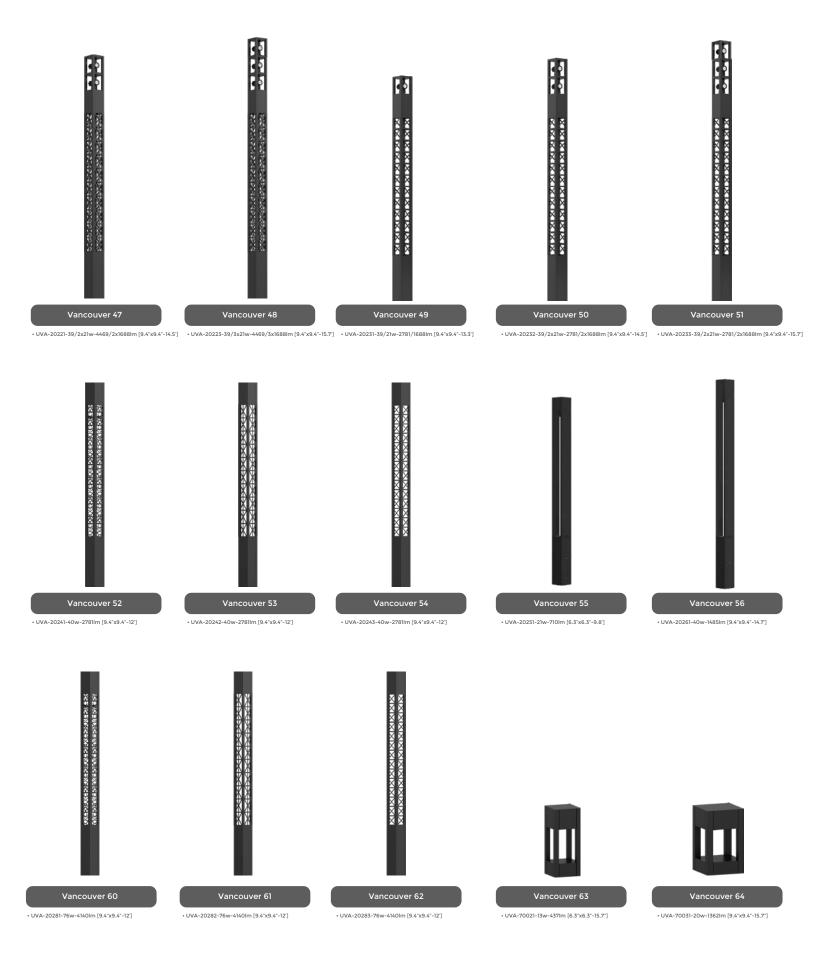



• UVA-70041-8w-165Im [6.3"x6.3"-15.7"]

• UVA-70051-21w-410Im [9.4"x9.4"-15.7"]

• UVA-30041-20w-1326Im [6.3."x6.3"-23.6"]

• UVA-30042-20w-1326Im [6.3."x6.3"-23.6"]

CARLES OF





• UVA-30051-40w-2781lm [9.4"x9.4"-39.3"]

Vancouver 71 • UVA-30052-40w-2781lm [9.4"x9.4"-39.3"]



• UVA-30053-40w-2781lm [9.4"x9.4"-39.3"]

• UVA-30043-20w-1326Im [6.3."x6.3"-23.6"]