

IP65 : Suitable for Wet Locations
 IK10 : Impact Resistant (Vandal Resistant)

UTA-20729 Tango 14 double post top HP LED

Tango post top luminaire was developed to compliment the Tango and Jet range of wall mount luminaires as well as the Jet square bollards, using energy saving compact fluorescent, metal halide and high pressure sodium lamps. This rectangular profiled luminaire mounted on a square extruded aluminum pole is available with different reflectors, downward light beam distributions and lamp options. Designed for residential and shopping areas, squares and parks. Available with a selection of integral electronic ballasts.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass lens. Single cable entry. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

Physical Data

Length: 25.6"

Height: 10.86"

Weight: 58.8 lb

Lamp

2x40w - 5500lm - White - LED ☉

Beam Angle (Please Specify)

- N - Narrow Beam - 10°
- M - Medium Beam - 12°
- W - Wide Beam - 30°

LED Color (Please Specify)

- W27 - 2700K
- W30 - 3000K
- W40 - 4000K

Voltage (Please Specify)

- 120V
- 277V
- Other _____






Color (Please Specify)

- 01-Black - RAL 9011
- 02- Dark Grey - RAL 7043
- 03-White - RAL 9003
- 04 - Metallic Silver - RAL 9006
- 05-Matt Silver - RAL 9006
- 07- Custom - RAL _____
- 06-Bronze - RAL 6014



Lens

- F - Frosted Lens
- C - Clear Lens
- HGT - Specify Custom Height _____ ft

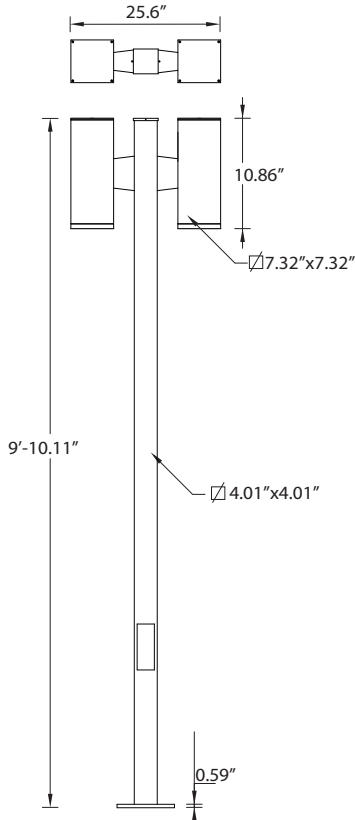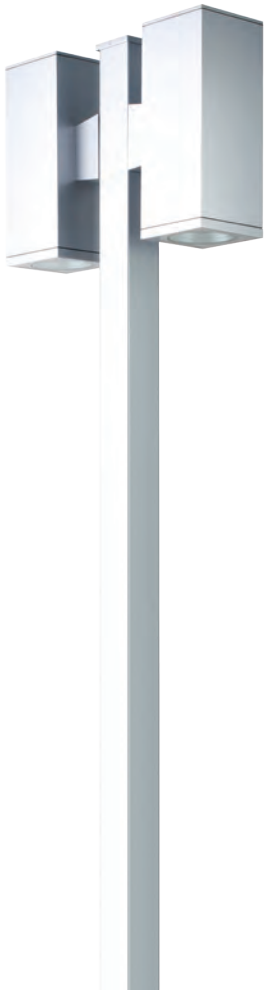

Ordering Example : UTA - 20729- White - 2x40w - N - W30 - 120v - Options



Rev: 11/13

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice.

