

Tauras light column

IP55 ✱ ▲ ▲/EN 60598/CLASS I Ⓢ/▽/CE/IK08




Suitable for wet locations

A decorative light column with symmetrical light distribution using energy saving compact fluorescent, metal halide and high pressure sodium lamps. Designed to compliment the Tauras wall light, Tauras bollard and Tauras pillar light. A sleek and minimalist shape provides distinctive lighting effects by night and decorative urban effect during the day. Suitable for pedestrian areas, precincts, building surrounds, shopping centers, squares and parks.

Extruded aluminum column and low copper content die-cast aluminium housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate diffuser with anodized high purity aluminum reflector. Housing is treated with a chemical chromatized protection before powder coating, ensuring high corrosion resistance. Available with a selection of integral electronic and fluorescent dimming electronic ballast, ensures extended lamp life energy saving capabilities and integration with building management systems. Easy access for lamp replacement by using screws to remove the cylindrical lantern portion. Emergency ballast options are available for egress lighting solutions.






Tempest two winery Hunter Valley, Australia

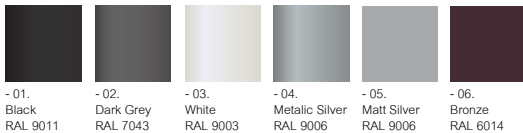


Product Family



Model No.	Lamp	Holder	Lumen	Weight	Picture
UTU-20391-1	CFQ 18w.	G24q-2	1075	69.4 lb.	1
UTU-20392-1	CFQ 26w./CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	69.6 lb.	1
UTU-20393-1	PMH-ED17 50w.	MED	2100	71.8 lb.	1
UTU-20394-1	PMH-ED17 70w.	MED	4000	71.8 lb.	1
UTU-20395-1	HPS-ED17 50w.	MED	3600	71.8 lb.	1
UTU-20396-1	HPS-ED17 70w.	MED	5450	71.8 lb.	1
UTU-20391-2	CFQ 18w.	G24q-2	1075	69.4 lb.	2
UTU-20392-2	CFQ 26w./CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	69.6 lb.	2
UTU-20393-2	PMH-ED17 50w.	MED	2100	71.8 lb.	2
UTU-20394-2	PMH-ED17 70w.	MED	4000	71.8 lb.	2
UTU-20395-2	HPS-ED17 50w.	MED	3600	71.8 lb.	2
UTU-20396-2	HPS-ED17 70w.	MED	5450	71.8 lb.	2



Picture 1



Picture 2

