

IP65 : Suitable for Wet Locations
 IK10 : Impact Resistant (Vandal Resistant)

UTA-80431

Tango 16 square surface exterior downlight LED

A range of cylindrical surface mounted exterior downlight luminaires. Developed for interior and exterior lighting using a variety of different lamp options. These include compact fluorescent lamps, and discharge lamps.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Single cable entry. Housing is treated with a chemical chroma-tized protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

Physical Data

Length: 7.32"

Height: 10.2"

Weight: 9.9 lbs

Lamp

40w - 2750lm - White - LED ☺

Beam Angle (Please Specify)

N - Narrow Beam: 14 Deg

M - Medium Beam: 24 Deg

W - Wide Beam: 40 Deg

LED Color (Please Specify)

W27 - 2700K

W30 - 3000K

W40 - 4000K

Voltage (Please Specify)

120V

277V

Other _____

Color (Please Specify)

01-Black - RAL 9011

02- Dark Grey - RAL 7043

03-White - RAL 9003

04 - Metallic Silver - RAL 9006

05-Matt Silver - RAL 9006

07- Custom - RAL _____


06-Bronze - RAL 6014



Lens

F - Frosted Lens




C - Clear Lens



SCE - Surface Conduit Entry Box - 1/2" Conduit 3/4" Conduit

Mounting Ring

HGT - Specify Custom Height _____ ft

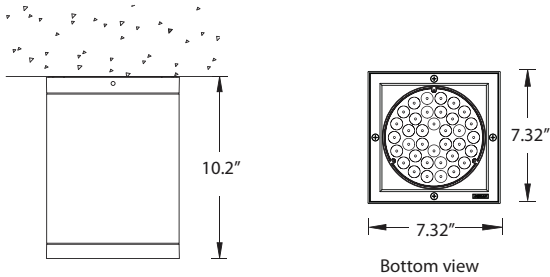

Mounting detail

Ordering Example : UTA - 80431 - White-40w - N - W30 - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
 Due to the continual improvements in LED technology data and components may change without notice.



Rev: 11/13

