




For installation of Gino 3,4,5,6 wall down and up-down light.
Model. UGI-31091,UGI-31101,UGI-31111 and UGI-31121.

Product drawing (dimensions)


SUITABLE FOR WET LOCATIONS

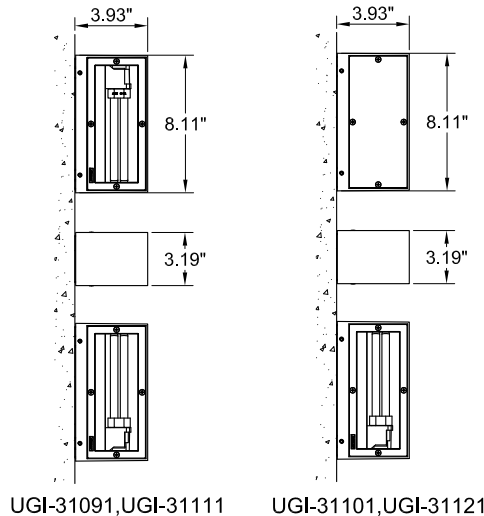





MOUNTING DETAIL




NOTE Mounts over a 3" Octagonal Junction box.




Position the body over the J Box and Secure the back plate to the wall






Connect Power and Ground Wire.



Ensure watertight seal using UL approved silicone based sealant.



Install lamp



Notice to installer :

1. **WIRING INSTRUCTIONS** Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.
2. This fixture has a **VOLTAGE SPECIFIC BALLAST**, Check that the supply voltage is the same as the installed ballast voltage.

Ligman Lighting USA

7144 NW Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

UGI-31091/28/09/12/REV.0
1/1



FM-TS-13/25-05-2007-REV.2