
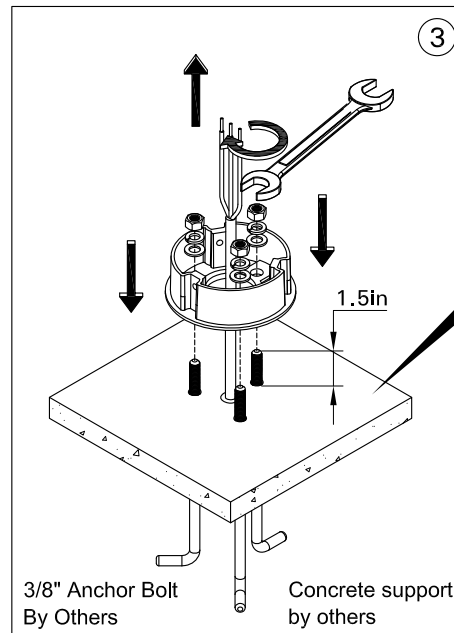
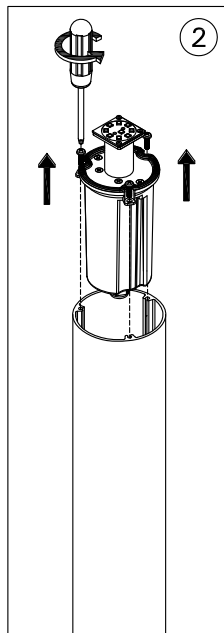
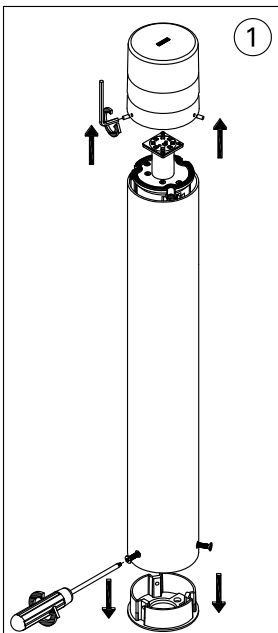


For installation of Mini lightsoft bollard LED.

Product drawing (dimensions)

SUITABLE FOR WET LOCATIONS

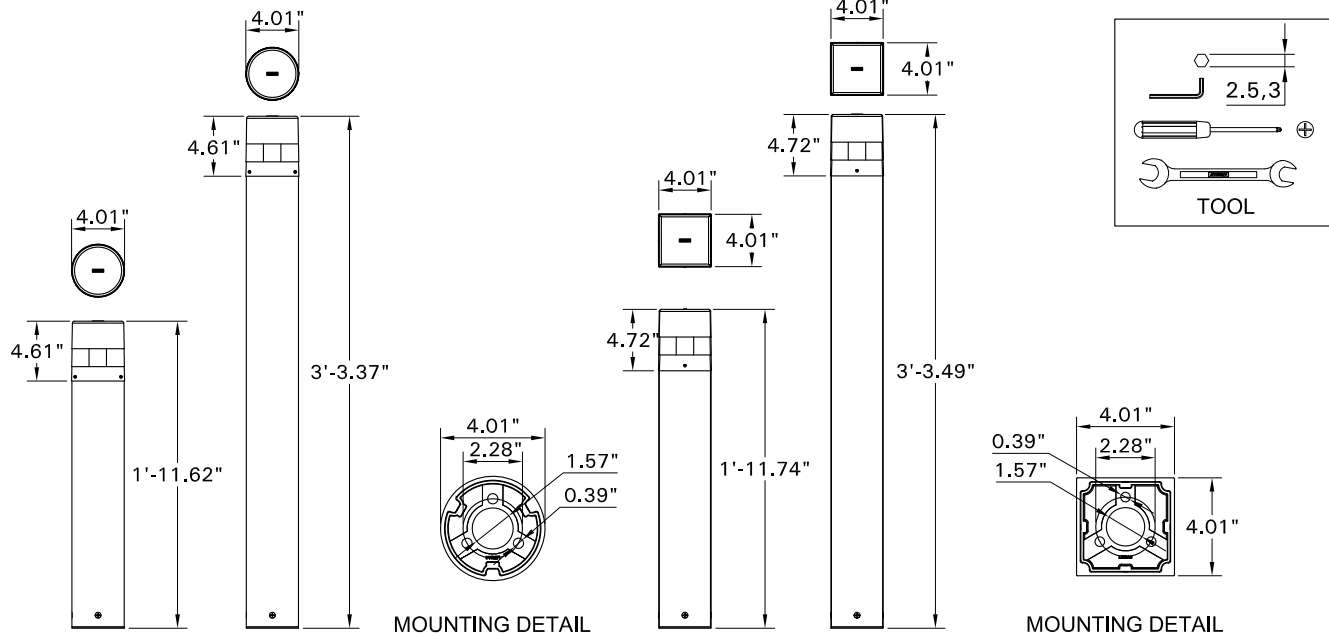

The contractor is to provide a flush and level concrete platform so that the fixtures aluminum base can be securely fastened to stop movement of the bollard.

If the base is not level, it will result in an incorrect installation and not be acceptable.

Notice to installer :

- 1.WIRING INSTRUCTIONS** Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.
- 2.This fixture has a VOLTAGE SPECIFIC BALLAST,Check that the supply voltage is the same as the installed ballast voltage.**

Ligman Lighting USA

7144 NW Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

ULH-10574 04/09/14 REV.0

1/2




FM-TS-13/25-05-2007-REV.2


NOTE

Ensure the connection is positioned +10" to 12" above Ground Level to avoid water.


4

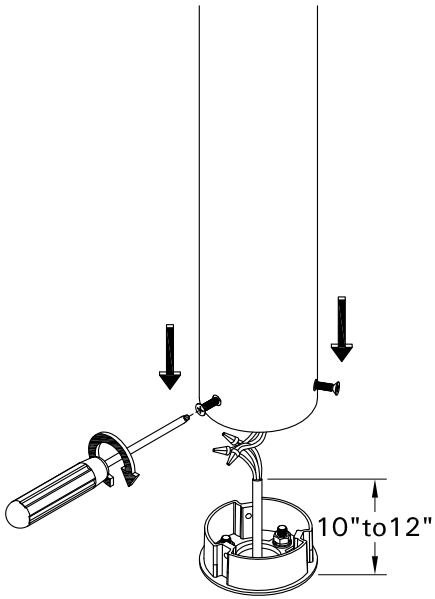


5

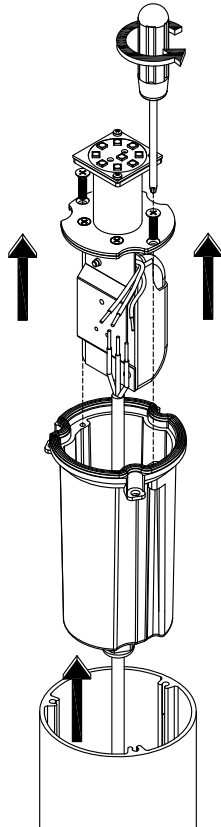


6

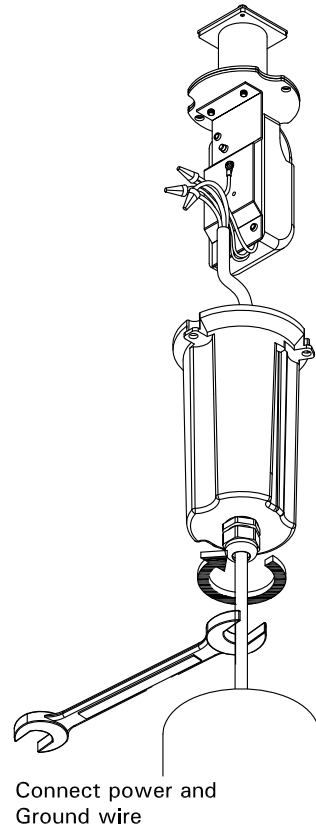

7

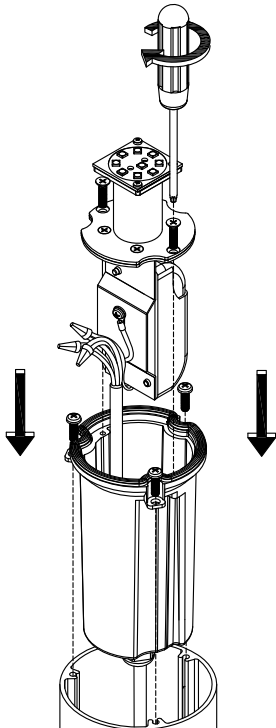

8

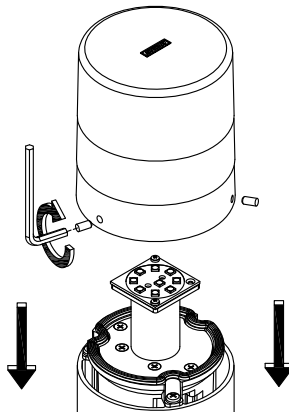

9

