



For Installation of Accessories Odessa Medium LED UOD-50011.
Model. A80114, A80131, A80231 and A50341.

Product drawing (dimensions)


SUITABLE FOR WET LOCATIONS



Linear spread lens
A80114




Anti-glare attachment
A80131



Anti-glare louvre
A80231

Unscrew 3 Screws Holding
Front Bezel to Fixture Housing


①

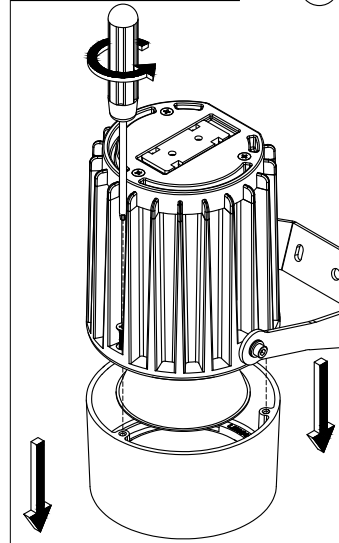

Remove Old Bezel

Replace with New Bezel
designed for Accessories

②

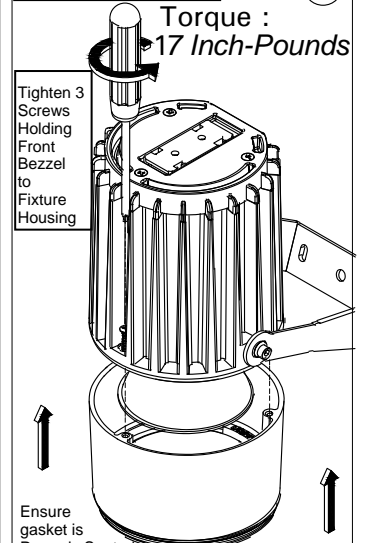


Tighten 3
Screws
Holding
Front
Bezel
to
Fixture
Housing

Ensure
gasket is
Properly Seated
between bezel and Fixture Housing

Slide Accessory
Option
into New Front
Bezel


Tighten the 3 Set
Screws on
Accessory
Bezel

Torque :
17 Inch-Pounds




Linear spread lens

Torque :
17 Inch-Pounds



Anti-glare attachment


Torque :
17 Inch-Pounds




Anti-glare louvre

③

Torque :
17 Inch-Pounds



LIGHT DISTRIBUTION FOR
LINEAR SPREAD LENS DETAIL

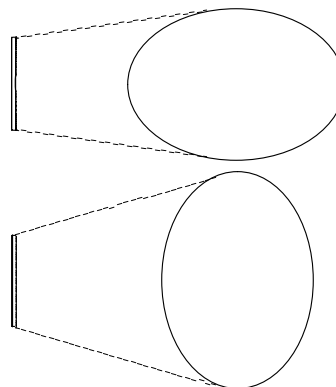

Ligman Lighting USA

Notice to Installer

Wiring Instruction ⚠ Warning:

- Risk of Fire and Electrical Shock, This fixture must be installed only by a qualified electrician, Installation must adhere to the National Electrical Code (NEC) and all applicable local and federal regulations.
- Always disconnect power before servicing the fixture.