
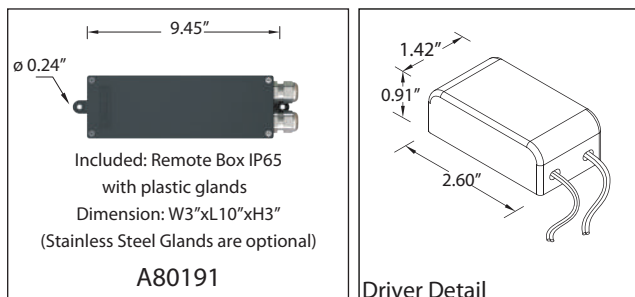
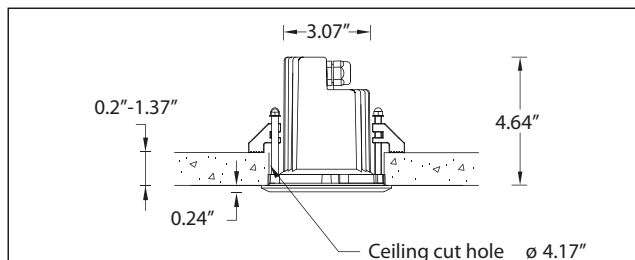


IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)

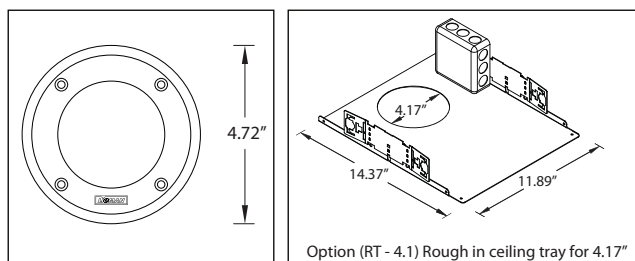

UNI-80335

Nikon round recessed exterior downlight LED

A compact recessed exterior downlight with a round or square front frame design. Easy to install and relamp. Options of stainless steel or powder coated aluminum front frame. The luminaires are designed for use in interior and exterior applications in shopping and public areas as a decorative ceiling downlight. This fixture is totally waterproof. This means that the fixture can be exposed to the elements from above, as well as below.

Main characteristics are low glare and the limited maintenance concept when using LED's. The luminaires have a high quality LED source with low energy consumption and long service life 60,000 – 80,000 hrs.

The Luminaire is rated as class I with the high power LED integral driver, and class II when using a remote LED driver.

Low copper content die-cast aluminum housing with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Option of .24\" aluminum or thick grade 304 stainless steel front frame. Grade 316 stainless steel screws. Power is provided to the luminaire through a single PG9 watertight cable gland and 4ft of Outdoor Submersible #18/3 SOOW 600V power cable. Durable silicone rubber gasket and clear toughened glass. Options of integral or remote mounted drivers are available. Includes A80191 driver enclosure box.

Both the high power LED and the SMD (LED's) are available in red, blue, amber, green and white 2700K, 3000K, 4000K. Consult factory for additional colors.

Physical Data

Diameter: 4.72"

Weight: 1.5 lbs

Lamp

☐ 9w - 195lm - White - LED ☺

Beam Angle (Please Specify)

☐ N - Narrow Beam: 16 Deg

☐ M - Medium Beam: 24 Deg

LED Color (Please Specify)

☐ W27 - 2700K

☐ W30 - 3000K

☐ W40 - 4000K

Voltage (Please Specify)

☐ 120V

☐ 277V

☐ Other _____

Options (Please Specify)

Front Ring Style

☐ Stainless Steel

☐ Aluminum

Color (Please Specify for Aluminum Style Only)

☐ 01-Black - RAL 9011

☐ 03-White - RAL 9003

☐ 05-Matt Silver - RAL 9006

☐ 06-Bronze - RAL 6014

☐ 02- Dark Grey - RAL 7043

☐ 04 - Metallic Silver - RAL 9006

☐ 07- Custom - RAL _____



Lens

☐ F - Frosted Lens


☐ Honeycomb Louvre (A60121)

☐ C - Clear Lens

☐ Rough in Ceiling Tray

☐ Concrete Pour Box

☐ Stainless Steel Glands for Remote Box



Ordering Example : UNI - 80335 - White - 9w - N - W30 - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.