
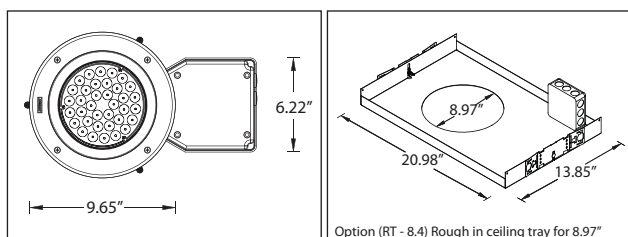


IP65 : Suitable for Wet Locations

IK09 : Impact Resistant (Vandal Resistant)

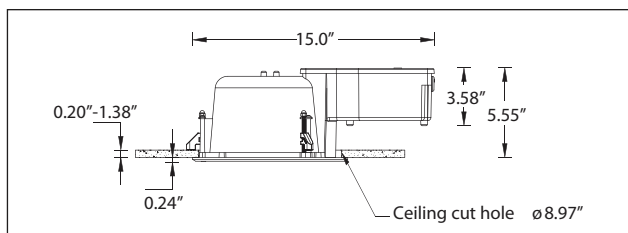

UOL-80541

Ole recessed exterior downlight LED

Ole is a shallow recessed exterior downlight using horizontally mounted compact fluorescent lamps with a round aluminum front frame.

Easy to install. Re-lamping can be achieved from below or above the luminaire. The luminaires are designed for all areas of interior and exterior lighting. Ole is ball proof and also suitable for sports facilities.

High efficiency vacuum metaled high purity aluminum reflector provides exceptional light distribution. Low copper content die-cast aluminum housing with a chemical chromatized protection before powder coating, ensuring high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass.

Physical Data

Length: 15.0"

Height: 5.5"

Weight: (S) 8.1 (A) 6.8 lbs

Lamp

☐ 40w - 2815lm - White - LED ☉

Beam Angle (Please Specify)

☐ N - Narrow Beam: 12 Deg

☐ M - Medium Beam: 22 Deg

☐ W - Wide Beam: 39 Deg

LED Color (Please Specify)

☐ W27 - 2700K

☐ W30 - 3000K

☐ W40 - 4000K

Voltage (Please Specify)

☐ 120V

☐ 277V

☐ Other _____

Options (Please Specify)

Front Ring Style

☐ Stainless Steel

☐ Aluminum

Color (Please Specify)

☐ 01-Black - RAL 9011

☐ 03-White - RAL 9003

☐ 05-Matt Silver - RAL 9006

☐ 06-Bronze - RAL 6014

☐ 02- Dark Grey - RAL 7043

☐ 04- Metallic Silver - RAL 9006

☐ 07- Custom - RAL _____





Lens

☐ F - Frosted Lens

☐ C - Clear Lens

☐ Rough in Ceiling Tray

☐ Concrete Pour Galvanized Steel Box

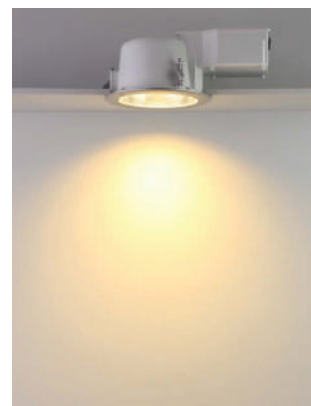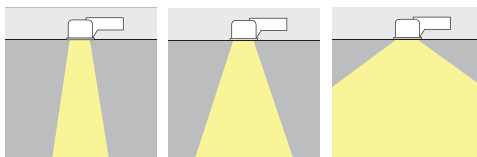

Ordering Example : UOL - 80541 - White-40w - N - W30 - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.