

IP55 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)

UTU-20392

Taurus light column

A decorative light column with symmetrical light distribution using energy saving compact fluorescent, metal halide and high pressure sodium lamps. Designed to compliment the Taurus wall light, Taurus bollard and Taurus pillar light. A sleek and minimalist shape provides distinctive lighting effects by night and decorative urban effect during the day. Suitable for pedestrian areas, precincts, building surrounds, shopping centers, squares and parks.

Extruded aluminum column and low copper content die cast housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate diffuser with anodized high purity aluminum reflector. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Available with a selection of integral electronic and fluorescent dimming electronic ballast, ensures extended lamp life energy saving capabilities and integration with building management systems. Easy access for lamp replacement by using screws to remove the cylindrical lantern portion. Emergency ballast options are available for compact fluorescent egress lighting solutions.

Physical Data

Length: 6.3"

Height: 10' 2"

Weight: 69.6 lb

Lamp

☐ CFQ 26w./CFTR 32/42w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V

☐ 277V

☐ Other _____

Options (Please Specify)

Color (Please Specify)

☐ 01-Black - RAL 9011

☐ 03-White - RAL 9003

☐ 05-Matt Silver - RAL 9006

☐ 06-Bronze - RAL 6014

☐ 02- Dark Grey - RAL 7043

☐ 04 - Metallic Silver - RAL 9006

☐ 07- Custom - RAL _____



Diffuser



☐ C - Clear



☐ O - Opal

Top Style



☐ (1) - Dome





☐ (2) - Flat




☐ (3) - Cone

☐ HGT - Specify Custom Height _____ ft

☐ GFCI - GFCI Receptacle - Specify Position _____

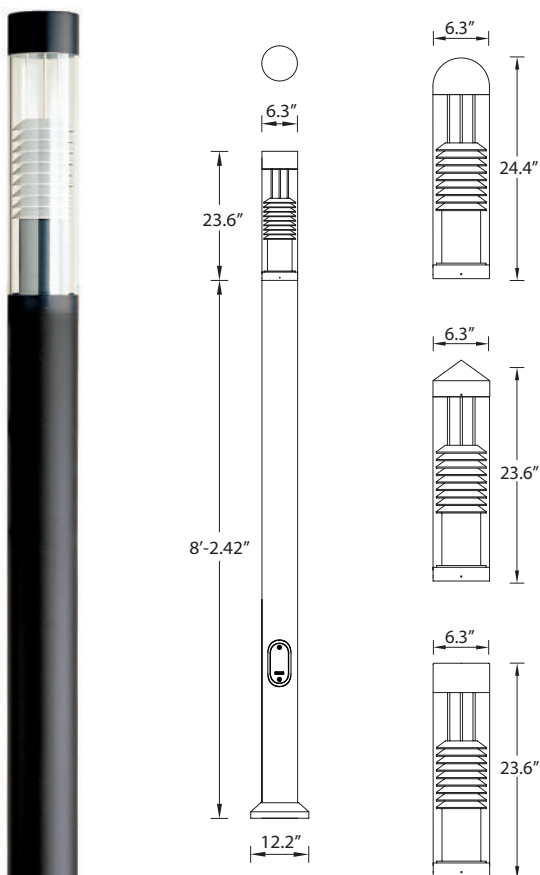

Mounting detail

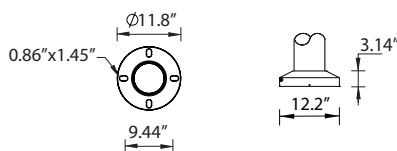

Ordering Example : UTU - 20392 - CFQ - 26w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.