



Taurus bollard


IP55 ✱ ▲ ▲ / EN 60598/CLASS I ⚡ / ▽ / CE / IK08




Suitable for wet locations

A decorative bollard with a symmetrical light distribution with options of energy saving compact fluorescent, metal halide and high pressure sodium lamps. Developed to compliment the Taurus range of pillar light, light column and wall light luminaires. Designed for various applications including entrances, gardens, precincts and pathways. The LED luminaires have features such as long life, limited maintenance and constant lifetime performance.

Extruded aluminum column and low copper content die-cast aluminium housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear or opal impact resistant UV stabilized polycarbonate diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear Anodized high purity aluminum reflector with the clear diffuser option. The internal control gear is secured in a separate but integral waterproof housing. Maintenance is performed from the top of the luminaire.




Product Family

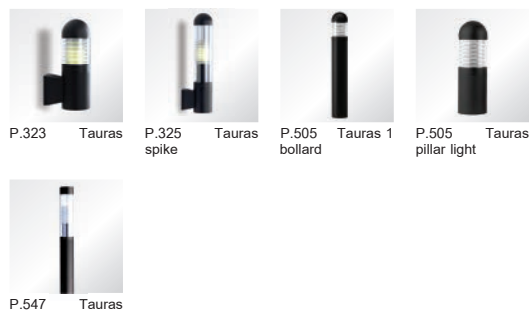

Accessories





Anchor bolt kit for installation



Model No.	For model No.
A10291	UTU-10131-10136 UTU-10141-10146 UTU-70101-70107
A10391	UTU-10151-10157 UTU-10161-10167 UTU-70111-70117



UTU-10141-1-C

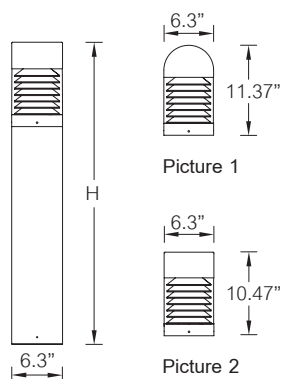

Taurus 1 bollard Clear diiffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-10131-1-C	CFQ 18w.	G24q-2	1075	15.4 lb.	27.99"	1
UTU-10132-1-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	15.6 lb.	27.99"	1
UTU-10131-2-C	CFQ 18w.	G24q-2	1075	15.4 lb.	29.44"	2
UTU-10132-2-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	15.6 lb.	29.44"	2
UTU-10141-1-C	CFQ 18w.	G24q-2	1075	18.0 lb.	42.36"	1
UTU-10142-1-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.3 lb.	42.36"	1
UTU-10141-2-C	CFQ 18w.	G24q-2	1075	18.0 lb.	41.45"	2
UTU-10142-2-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.3 lb.	41.45"	2

Taurus 1 bollard LED Clear diiffuser



Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-10136-1-C-W27	1 LED	762 lm	2700K	40	15.4 lb.	27.99"	1	•
UTU-10136-1-C-W30	1 LED	811 lm	3000K	40	15.4 lb.	27.99"	1	•
UTU-10136-1-C-W40	1 LED	865 lm	4000K	40	15.4 lb.	27.99"	1	•
UTU-10136-2-C-W27	1 LED	762 lm	2700K	40	15.4 lb.	29.44"	2	•
UTU-10136-2-C-W30	1 LED	811 lm	3000K	40	15.4 lb.	29.44"	2	•
UTU-10136-2-C-W40	1 LED	865 lm	4000K	40	15.4 lb.	29.44"	2	•
UTU-10146-1-C-W27	1 LED	762 lm	2700K	40	18.0 lb.	42.36"	1	•
UTU-10146-1-C-W30	1 LED	811 lm	3000K	40	18.0 lb.	42.36"	1	•
UTU-10146-1-C-W40	1 LED	865 lm	4000K	40	18.0 lb.	42.36"	1	•
UTU-10146-2-C-W27	1 LED	762 lm	2700K	40	18.0 lb.	41.45"	2	•
UTU-10146-2-C-W30	1 LED	811 lm	3000K	40	18.0 lb.	41.45"	2	•
UTU-10146-2-C-W40	1 LED	865 lm	4000K	40	18.0 lb.	41.45"	2	•

Taurus 1 Pillar light Clear diiffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-70101-1-C	CFQ 18w.	G24q-2	1075	13.0 lb.	19.68"	1
UTU-70102-1-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	13.2 lb.	19.68"	1
UTU-70101-2-C	CFQ 18w.	G24q-2	1075	13.0 lb.	18.89"	2
UTU-70102-2-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	13.2 lb.	18.89"	2


Taurus 1 Pillar light LED Clear diiffuser

Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-70107-1-C-W27	1 LED	762 lm	2700K	40	13.0 lb.	19.68"	1	•
UTU-70107-1-C-W30	1 LED	811 lm	3000K	40	13.0 lb.	19.68"	1	•
UTU-70107-1-C-W40	1 LED	865 lm	4000K	40	13.0 lb.	19.68"	1	•
UTU-70107-2-C-W27	1 LED	762 lm	2700K	40	13.0 lb.	18.89"	2	•
UTU-70107-2-C-W30	1 LED	811 lm	3000K	40	13.0 lb.	18.89"	2	•
UTU-70107-2-C-W40	1 LED	865 lm	4000K	40	13.0 lb.	18.89"	2	•

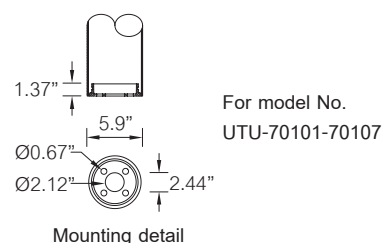



UTU-10141-1-O



Taurus 1 bollard Opal diiffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-10131-1-O	CFQ 18w.	G24q-2	1075	14.5 lb.	27.99"	1
UTU-10132-1-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	14.7 lb.	27.99"	1
UTU-10131-2-O	CFQ 18w.	G24q-2	1075	14.5 lb.	29.44"	2
UTU-10132-2-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	14.7 lb.	29.44"	2
UTU-10141-1-O	CFQ 18w.	G24q-2	1075	17.2 lb.	42.36"	1
UTU-10142-1-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	17.4 lb.	42.36"	1
UTU-10141-2-O	CFQ 18w.	G24q-2	1075	17.2 lb.	41.45"	2
UTU-10142-2-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	17.4 lb.	41.45"	2

Taurus 1 bollard LED Opal diiffuser



Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-10136-1-O-W27	1 LED	745 lm	2700K	40	15.4 lb.	27.99"	1	•
UTU-10136-1-O-W30	1 LED	793 lm	3000K	40	15.4 lb.	27.99"	1	•
UTU-10136-1-O-W40	1 LED	826 lm	4000K	40	15.4 lb.	27.99"	1	•
UTU-10136-2-O-W27	1 LED	745 lm	2700K	40	15.4 lb.	29.44"	2	•
UTU-10136-2-O-W30	1 LED	793 lm	3000K	40	15.4 lb.	29.44"	2	•
UTU-10136-2-O-W40	1 LED	826 lm	4000K	40	15.4 lb.	29.44"	2	•
UTU-10146-1-O-W27	1 LED	745 lm	2700K	40	18.0 lb.	42.36"	1	•
UTU-10146-1-O-W30	1 LED	793 lm	3000K	40	18.0 lb.	42.36"	1	•
UTU-10146-1-O-W40	1 LED	826 lm	4000K	40	18.0 lb.	42.36"	1	•
UTU-10146-2-O-W27	1 LED	745 lm	2700K	40	18.0 lb.	41.45"	2	•
UTU-10146-2-O-W30	1 LED	793 lm	3000K	40	18.0 lb.	41.45"	2	•
UTU-10146-2-O-W40	1 LED	826 lm	4000K	40	18.0 lb.	41.45"	2	•

Taurus 1 Pillar light Opal diiffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-70101-1-O	CFQ 18w.	G24q-2	1075	13.0 lb.	19.68"	1
UTU-70102-1-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	13.2 lb.	19.68"	1
UTU-70101-2-O	CFQ 18w.	G24q-2	1075	13.0 lb.	18.89"	2
UTU-70102-2-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	13.2 lb.	18.89"	2





Taurus 1 Pillar light LED Opal diiffuser

Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-70107-1-O-W27	1 LED	745 lm	2700K	40	13.0 lb.	19.68"	1	•
UTU-70107-1-O-W30	1 LED	793 lm	3000K	40	13.0 lb.	19.68"	1	•
UTU-70107-1-O-W40	1 LED	826 lm	4000K	40	13.0 lb.	19.68"	1	•
UTU-70107-2-O-W27	1 LED	745 lm	2700K	40	13.0 lb.	18.89"	2	•
UTU-70107-2-O-W30	1 LED	793 lm	3000K	40	13.0 lb.	18.89"	2	•
UTU-70107-2-O-W40	1 LED	826 lm	4000K	40	13.0 lb.	18.89"	2	•

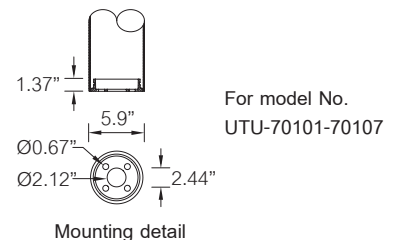



UTU-10161-2-C

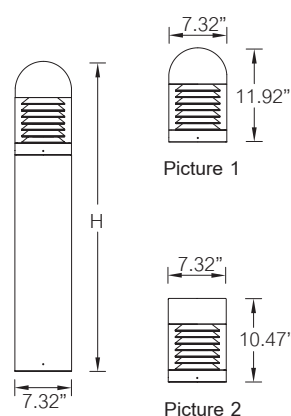

Taurus 2 bollard Clear diffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-10151-1-C	CFQ 18w.	G24q-2	1075	18.0 lb.	30.9"	1
UTU-10152-1-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.3 lb.	30.9"	1
UTU-10153-1-C	PMH-ED17 50w.	MED	2100	20.0 lb.	30.9"	1
UTU-10154-1-C	PMH-ED17 70w.	MED	4000	20.0 lb.	30.9"	1
UTU-10155-1-C	HPS-ED17 50w.	MED	3600	19.1 lb.	30.9"	1
UTU-10156-1-C	HPS-ED17 70w.	MED	5450	19.1 lb.	30.9"	1
UTU-10151-2-C	CFQ 18w.	G24q-2	1075	18.0 lb.	29.44"	2
UTU-10152-2-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.3 lb.	29.44"	2
UTU-10153-2-C	PMH-ED17 50w.	MED	2100	20.0 lb.	29.44"	2
UTU-10154-2-C	PMH-ED17 70w.	MED	4000	20.0 lb.	29.44"	2
UTU-10155-2-C	HPS-ED17 50w.	MED	3600	19.1 lb.	29.44"	2
UTU-10156-2-C	HPS-ED17 70w.	MED	5450	19.1 lb.	29.44"	2
UTU-10161-1-C	CFQ 18w.	G24q-2	1075	18.5 lb.	42.91"	1
UTU-10162-1-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.7 lb.	42.91"	1
UTU-10163-1-C	PMH-ED17 50w.	MED	2100	20.5 lb.	42.91"	1
UTU-10164-1-C	PMH-ED17 70w.	MED	4000	20.5 lb.	42.91"	1
UTU-10165-1-C	HPS-ED17 50w.	MED	3600	20.0 lb.	42.91"	1
UTU-10166-1-C	HPS-ED17 70w.	MED	5450	20.0 lb.	42.91"	1
UTU-10161-2-C	CFQ 18w.	G24q-2	1075	18.5 lb.	41.45"	2
UTU-10162-2-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.7 lb.	41.45"	2
UTU-10163-2-C	PMH-ED17 50w.	MED	2100	20.5 lb.	41.45"	2
UTU-10164-2-C	PMH-ED17 70w.	MED	4000	20.5 lb.	41.45"	2
UTU-10165-2-C	HPS-ED17 50w.	MED	3600	20.0 lb.	41.45"	2
UTU-10166-2-C	HPS-ED17 70w.	MED	5450	20.0 lb.	41.45"	2

Taurus 2 bollard LED Clear diffuser


Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-10157-1-C-W27	1 LED	617 lm	2700K	40	18.0 lb.	30.9"	1	•
UTU-10157-1-C-W30	1 LED	657 lm	3000K	40	18.0 lb.	30.9"	1	•
UTU-10157-1-C-W40	1 LED	680 lm	4000K	40	18.0 lb.	30.9"	1	•
UTU-10157-2-C-W27	1 LED	617 lm	2700K	40	18.0 lb.	29.44"	2	•
UTU-10157-2-C-W30	1 LED	657 lm	3000K	40	18.0 lb.	29.44"	2	•
UTU-10157-2-C-W40	1 LED	680 lm	4000K	40	18.0 lb.	29.44"	2	•
UTU-10167-1-C-W27	1 LED	617 lm	2700K	40	18.5 lb.	42.91"	1	•
UTU-10167-1-C-W30	1 LED	657 lm	3000K	40	18.5 lb.	42.91"	1	•
UTU-10167-1-C-W40	1 LED	680 lm	4000K	40	18.5 lb.	42.91"	1	•
UTU-10167-2-C-W27	1 LED	617 lm	2700K	40	18.5 lb.	41.45"	2	•
UTU-10167-2-C-W30	1 LED	657 lm	3000K	40	18.5 lb.	41.45"	2	•
UTU-10167-2-C-W40	1 LED	680 lm	4000K	40	18.5 lb.	41.45"	2	•

Taurus 2 Pillar light Clear diffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-70111-1-C	CFQ 18w.	G24q-2	1075	11.9 lb.	20.19"	1
UTU-70112-1-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	12.1 lb.	20.19"	1
UTU-70113-1-C	PMH-ED17 50w.	MED	2100	14.7 lb.	20.19"	1
UTU-70114-1-C	PMH-ED17 70w.	MED	4000	14.7 lb.	20.19"	1
UTU-70115-1-C	HPS-ED17 50w.	MED	3600	14.9 lb.	20.19"	1
UTU-70116-1-C	HPS-ED17 70w.	MED	5450	14.9 lb.	20.19"	1
UTU-70111-2-C	CFQ 18w.	G24q-2	1075	11.9 lb.	18.81"	2
UTU-70112-2-C	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	12.1 lb.	18.81"	2
UTU-70113-2-C	PMH-ED17 50w.	MED	2100	14.7 lb.	18.81"	2
UTU-70114-2-C	PMH-ED17 70w.	MED	4000	14.7 lb.	18.81"	2
UTU-70115-2-C	HPS-ED17 50w.	MED	3600	14.9 lb.	18.81"	2
UTU-70116-2-C	HPS-ED17 70w.	MED	5450	14.9 lb.	18.81"	2


Taurus 2 Pillar light LED Clear diffuser

Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-70117-1-C-W27	1 LED	617 lm	2700K	40	11.9 lb.	20.19"	1	•
UTU-70117-1-C-W30	1 LED	657 lm	3000K	40	11.9 lb.	20.19"	1	•
UTU-70117-1-C-W40	1 LED	680 lm	4000K	40	11.9 lb.	20.19"	1	•
UTU-70117-2-C-W27	1 LED	617 lm	2700K	40	11.9 lb.	18.81"	2	•
UTU-70117-2-C-W30	1 LED	657 lm	3000K	40	11.9 lb.	18.81"	2	•
UTU-70117-2-C-W40	1 LED	680 lm	4000K	40	11.9 lb.	18.81"	2	•

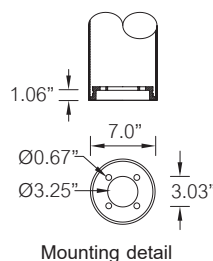



UTU-10161-2-O



Taurus 2 bollard Opal diffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-10151-1-O	CFQ 18w.	G24q-2	1075	18.0 lb.	30.9"	1
UTU-10152-1-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.3 lb.	30.9"	1
UTU-10153-1-O	PMH-ED17 50w.	MED	2100	20.0 lb.	30.9"	1
UTU-10154-1-O	PMH-ED17 70w.	MED	4000	20.0 lb.	30.9"	1
UTU-10155-1-O	HPS-ED17 50w.	MED	3600	19.1 lb.	30.9"	1
UTU-10156-1-O	HPS-ED17 70w.	MED	5450	19.1 lb.	30.9"	1
UTU-10151-2-O	CFQ 18w.	G24q-2	1075	18.0 lb.	29.44"	2
UTU-10152-2-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.3 lb.	29.44"	2
UTU-10153-2-O	PMH-ED17 50w.	MED	2100	20.0 lb.	29.44"	2
UTU-10154-2-O	PMH-ED17 70w.	MED	4000	20.0 lb.	29.44"	2
UTU-10155-2-O	HPS-ED17 50w.	MED	3600	19.1 lb.	29.44"	2
UTU-10156-2-O	HPS-ED17 70w.	MED	5450	19.1 lb.	29.44"	2
UTU-10161-1-O	CFQ 18w.	G24q-2	1075	18.5 lb.	42.91"	1
UTU-10162-1-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.7 lb.	42.91"	1
UTU-10163-1-O	PMH-ED17 50w.	MED	2100	20.5 lb.	42.91"	1
UTU-10164-1-O	PMH-ED17 70w.	MED	4000	20.5 lb.	42.91"	1
UTU-10165-1-O	HPS-ED17 50w.	MED	3600	20.0 lb.	42.91"	1
UTU-10166-1-O	HPS-ED17 70w.	MED	5450	20.0 lb.	42.91"	1
UTU-10161-2-O	CFQ 18w.	G24q-2	1075	18.5 lb.	41.45"	2
UTU-10162-2-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	18.7 lb.	41.45"	2
UTU-10163-2-O	PMH-ED17 50w.	MED	2100	20.5 lb.	41.45"	2
UTU-10164-2-O	PMH-ED17 70w.	MED	4000	20.5 lb.	41.45"	2
UTU-10165-2-O	HPS-ED17 50w.	MED	3600	20.0 lb.	41.45"	2
UTU-10166-2-O	HPS-ED17 70w.	MED	5450	20.0 lb.	41.45"	2

Taurus 2 bollard LED Opal diffuser



Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-10157-1-O-W27	1 LED	752 lm	2700K	40	18.0 lb.	30.9"	1	•
UTU-10157-1-O-W30	1 LED	801 lm	3000K	40	18.0 lb.	30.9"	1	•
UTU-10157-1-O-W40	1 LED	823 lm	4000K	40	18.0 lb.	30.9"	1	•
UTU-10157-2-O-W27	1 LED	752 lm	2700K	40	18.0 lb.	29.44"	2	•
UTU-10157-2-O-W30	1 LED	801 lm	3000K	40	18.0 lb.	29.44"	2	•
UTU-10157-2-O-W40	1 LED	823 lm	4000K	40	18.0 lb.	29.44"	2	•
UTU-10167-1-O-W27	1 LED	752 lm	2700K	40	18.5 lb.	42.91"	1	•
UTU-10167-1-O-W30	1 LED	801 lm	3000K	40	18.5 lb.	42.91"	1	•
UTU-10167-1-O-W40	1 LED	823 lm	4000K	40	18.5 lb.	42.91"	1	•
UTU-10167-2-O-W27	1 LED	752 lm	2700K	40	18.5 lb.	41.45"	2	•
UTU-10167-2-O-W30	1 LED	801 lm	3000K	40	18.5 lb.	41.45"	2	•
UTU-10167-2-O-W40	1 LED	823 lm	4000K	40	18.5 lb.	41.45"	2	•

Taurus 2 Pillar light Opal diffuser

Model No.	Lamp	Holder	Lumen	Weight	(H) Height	Picture
UTU-70111-1-O	CFQ 18w.	G24q-2	1075	11.9 lb.	20.19"	1
UTU-70112-1-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	12.1 lb.	20.19"	1
UTU-70113-1-O	PMH-ED17 50w.	MED	2100	14.7 lb.	20.19"	1
UTU-70114-1-O	PMH-ED17 70w.	MED	4000	14.7 lb.	20.19"	1
UTU-70115-1-O	HPS-ED17 50w.	MED	3600	14.9 lb.	20.19"	1
UTU-70116-1-O	HPS-ED17 70w.	MED	5450	14.9 lb.	20.19"	1
UTU-70111-2-O	CFQ 18w.	G24q-2	1075	11.9 lb.	18.81"	2
UTU-70112-2-O	CFQ 26w.CFTR 32/42w.	Gx24q-3/4	1550/2040/2720	12.1 lb.	18.81"	2
UTU-70113-2-O	PMH-ED17 50w.	MED	2100	14.7 lb.	18.81"	2
UTU-70114-2-O	PMH-ED17 70w.	MED	4000	14.7 lb.	18.81"	2
UTU-70115-2-O	HPS-ED17 50w.	MED	3600	14.9 lb.	18.81"	2
UTU-70116-2-O	HPS-ED17 70w.	MED	5450	14.9 lb.	18.81"	2

Taurus 2 Pillar light LED Opal diffuser

Model No.	Lamp	Light output	LED colour	Power W	Weight	(H) Height	Picture	Dimmable 1-10v
UTU-70117-1-O-W27	1 LED	752 lm	2700K	40	11.9 lb.	20.19"	1	•
UTU-70117-1-O-W30	1 LED	801 lm	3000K	40	11.9 lb.	20.19"	1	•
UTU-70117-1-O-W40	1 LED	823 lm	4000K	40	11.9 lb.	20.19"	1	•
UTU-70117-2-O-W27	1 LED	752 lm	2700K	40	11.9 lb.	18.81"	2	•
UTU-70117-2-O-W30	1 LED	801 lm	3000K	40	11.9 lb.	18.81"	2	•
UTU-70117-2-O-W40	1 LED	823 lm	4000K	40	11.9 lb.	18.81"	2	•

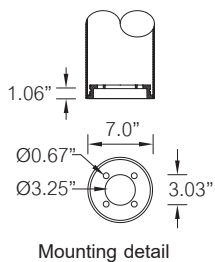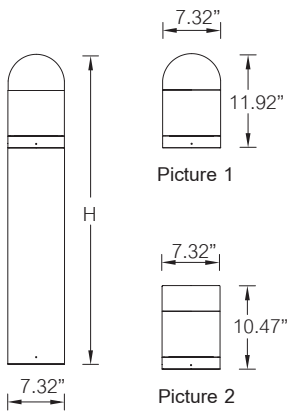

Mounting detail



(1) Dome top



(2) Flat top



(O) Opal diffuser

